

# CLERMONT COUNTY ACCESS MANAGEMENT REGULATIONS



Effective **January 1, 2009**  
Draft revised 12/3/09

## **TABLE OF CONTENTS**

ADMINISTRATION	1
SECTION 100 – General Access Connection and Driveway Design	2
SECTION 200 – Joint and Cross Access Drives	3-4
SINGLE FAMILY RESIDENTIAL Access Spacing Requirements	5
ALL USES (Except Single Family) Access Spacing Requirements	6
SECTION 300 – Traffic Impact Study Requirements	7-9
DEFINITIONS	10
FIGURE 1 – Throat Length	11
FIGURE 2 – Full Access Drive Locations	12
FIGURE 3 – Minimum Intersection to Drive Spacing	13

## **ADMINISTRATION**

### **AUTHORITY**

The Ohio Revised Code, Chapter 5552, enables the Board of County Commissioners to adopt Access Management Regulations for the purpose of promoting safe and efficient travel on all County and Township roadways in Clermont County.

### **PURPOSE**

These regulations are designed to protect the health, safety, and welfare of the traveling public. The goals of these regulations are as follows:

Improve public safety by reducing the number of conflict points and therefore potentially reducing the number of accidents.

Maintain or improve upon the level of service of our public roadways as additional properties develop in the area.

Control the number of access points on higher order roadways to help to improve the driving experience through increased travel efficiency and decreased delay. This will also help to ensure safe access to and from properties located on these roadways.

Proper management of access points to reduce congestion and minimize the need for public revenues used to mitigate poor travel conditions in the future.

## **ADMINISTRATION**

These regulations shall be implemented and administered by the Clermont County Engineer. These regulations will be applied to all applicable projects through the typical project review process. Contact the Clermont County Building Department for information regarding the residential or commercial review process or the Clermont County Planning Department for information regarding commercial or subdivision review.

## **JURISDICTION**

These regulations shall be applicable to all access connections designed or intended for motor vehicle use on county or township roads which are designed or constructed on or after the effective date of these regulations. These regulations do not apply to state, federal or municipal roadways, nor do they apply to subdivisions subject to plat approval under section 711.05 or 711.10 of the Ohio Revised Code.

## **APPEALS PROCESS**

In cases where the applicant and the County Engineer cannot resolve an issue, the applicant has the right to have their case reviewed before the Clermont County Board of Commissioners who will serve as the Access Management Appellate Board. This board may grant variances that are not contrary to the public interest from the terms of the regulations where a literal enforcement of the regulations will result in unnecessary hardship, and so that the spirit of the regulations will be observed and substantial justice served.

## Section 100 - General Access Connection and Driveway Design

- A. Driveways and or service drives shall be located on the lowest order of public roadway on which the lot has frontage or at a shared access point unless the Clermont County Engineer determines the public safety would be better served by allowing access on a higher order public roadway. For major residential subdivisions with private roadways and/or private driveways the locations will be determined during the Clermont County Engineer and the Clermont County Planning Department review process.
- B. Driveway access shall align with an existing opposing driveway or roadway wherever possible.
- C. Driveway design shall conform to the Clermont County Subdivision Street Design and Construction Standards.
- D. All access points along a public roadway must satisfy the sight distance requirements per the ODOT Location & Design Manual, Volume One.
- E. The length of driveways or “Throat Length” (see **Figure 1**) shall be designed in accordance with the anticipated storage length for entering and exiting vehicles to

prevent vehicles from backing up into the flow of traffic on the public highway or causing unsafe conflicts with onsite circulation.

F. Driveway approaches must be designed and located to provide an exiting vehicle with an unobstructed view. Except as provided by Section 100 G, construction of full access driveways along acceleration/deceleration lanes and tapers is prohibited due to potential for vehicular weaving conflicts and obstructing the public roadway (see **Figure 2**).

G. In all cases, the County Engineer may determine that more restrictive standards than those contained herein will be required for a particular development in the interest of public safety and maintaining adequate traffic flow when supported by a traffic impact study provided by the County Engineer or the developer. Any such increase in the standards contained herein is subject to the variance and appeals process. The County Engineer may also determine that less restrictive standards are more appropriate for a particular development in the event that a literal enforcement of the regulations will result in unnecessary hardship, provided that such variance is not contrary to the public interest and that the spirit of these regulations is followed.

H. Deviation from access spacing standards may be permitted as follows:

(1) Minor Deviation Request.

Minor deviations of 10% or less of the allowable connection spacing standard may be authorized by the County Engineer where a property is otherwise unable to meet the minimum connection spacing standards and where this deviation would not create a

safety problem on the public roadway. The County Engineer may consider the request and may approve, approve with conditions, or deny the minor deviation request.

(2) Major Deviation Request.

Requests for major deviations of greater than 10% shall be reviewed by the County Engineer. The County Engineer shall review and provide a technical recommendation relative to the deviation request and may approve, approve with conditions, or deny the major deviation request.

(a) Application Requirements.

Applicants requesting a major deviation from standards must submit an access management plan to the County Engineer for consideration and a traffic impact study shall be required at the expense of the applicant to assist in these determinations. At a minimum, the access management plan must:

(i) Encompass a study area defined by the length of the site's frontage plus the distance of the applicable connection spacing standard, measured from the property lines.

(ii) Include a review of both existing and future access for all properties within the study area.

(iii) Include a justification for the requested deviation. The justification must address how the proposed plan advances the principles of access management consistent with the stated goals and intent of these regulations.

(b) Access Spacing Modification Requirements.

After a review of the applicant's request for a Major Deviation Request, the County Engineer may modify the access spacing requirement if all of the following conditions have been met:

(i) A shared use driveway will be constructed to serve two or more abutting building sites;

(ii) The building site is designed to provide cross access and unified circulation with abutting sites with cross access easements;

and

(iii) The property owner executes an agreement to close any pre-existing curb-cuts that do not meet the requirements of these regulations after the construction of both sides of the shared use driveway, and agrees to enter a joint maintenance agreement defining maintenance responsibilities of property owners that share the joint use driveway and cross access system.

DRAFT

## Section 200 - Joint and Cross Access Drives

- A. A system of joint use service drives and cross access easements as illustrated in **Figure 3** should be established wherever feasible along arterials and collectors or in cases where minimum driveway spacing cannot be met.
- B. When joint and cross access service drives are needed the site shall incorporate the following:
- 1) A continuous service drive or cross access corridor extending the entire length of each parcel.
  - 2) Service drives shall be designed and constructed with a minimum ~~lane~~ width of 24 feet to accommodate a two-way travel aisle and designed to accommodate automobiles, service vehicles and loading vehicles.
  - 3) Stub streets and other design features to make it visually obvious that the abutting properties may be tied in to provide cross-access via a service drive.
  - 4) A unified access and circulation system plan that includes coordinated and or shared parking spaces is encouraged wherever possible.

C. Pursuant to this section, property owners shall:

- 1) Record easements with the deed to provide for cross access to and from their properties and for other properties served by joint use drives, cross access drives and or service drives. Easement rights shall be granted to adjoining properties relative to the overall access plan for that area (could be several parcels).
- 2) Record a declaration with the deed relinquishing their remaining access rights along the public highway and assign such access rights to the Clermont County Commissioners. Upon completion of the new access facilities, the pre-existing driveways will be closed and removed by the applicant, at the applicant's sole expense, after all of the access control features are constructed and have been approved by the Clermont County Engineer.
- 3) Record a joint maintenance agreement with the deed defining maintenance responsibilities of the property owners.
- 4) Construct common joint use drives, cross access drives and or service drives prior to the issuance of temporary or permanent Certificate of Occupancy.

- 5) Construct temporary access driveways, when permitted, prior to the issuance of temporary or permanent Certificate of Occupancy. When permanent access becomes available, temporary access shall be revoked and the temporary driveways shall be removed at the owner's expense.
- 6) Construct temporary driveways, when permitted, as directed by the Clermont County Engineer.

DRAFT

**TABLE 1 - SINGLE FAMILY RESIDENTIAL**

Roadway Classification	Minimum Roadway Spacing (Unsignalized)	Minimum Roadway Spacing (Signalized)	Minimum Driveway Spacing	Minimum Intersection to Driveway Spacing
Local	250'	N/A	200'	200'
Minor Collector	600	800	200'	200'
Major Collector/ Distributor	750	1500	200'	200'
Minor Arterial	ODOT	ODOT	ODOT	ODOT
Principal Arterial	ODOT	ODOT	ODOT	ODOT

See the Clermont County Thoroughfare Plan for a list of roadway functional classification.

Driveway spacing distances are to be measured from centerline to centerline. All other distances are to be measured from edge of pavement to edge of pavement.

Urban Collectors shall follow the Major Collector criteria in the above table.

**TABLE 2 - ALL USES**  
(Except Single Family Residential)

Roadway Classification	Minimum Roadway Spacing (Unsignalized)	Minimum Roadway Spacing (Signalized)	Minimum Driveway Spacing	Minimum Intersection to Driveway Spacing	Right In/ Right Out
Local	250'	N/A	Low 200'	Low 200'	N/A
			Med 200'	Med 200'	
			High 200'	High 200'	
Minor Collector	600	1000	Low 200'	Low 200'	Low 250'
			Med 300'	Med 300'	Med 300'
			High 600'	High 600'	A
Major Collector/ Distributor	800	1500	Low 250'	Low 250'	Low 300'
			Med 350'	Med 350'	Med 350'
			High 800'	High 800'	A
Minor Arterial	ODOT	ODOT	ODOT	ODOT	ODOT
Principal Arterial	ODOT	ODOT	ODOT	ODOT	ODOT

Low < 50 Peak Hr Trip Ends  
 Medium 50 > 200 Peak Hr Trip Ends  
 High > 200 Peak Hr Trip Ends

Note A To be determined through evaluation of TIS

See the Clermont County Thoroughfare Plan for a list of roadway functional classification. Driveway spacing distances are to be measured from centerline to centerline. All other distances are to be measured from edge of pavement to edge of pavement. Urban Collectors shall follow the Major Collector criteria in the above table.

## **SECTION 300 - TRAFFIC IMPACT STUDY REQUIREMENTS**

### **301 - PURPOSE**

A Traffic Impact Study (TIS) is a document that analyzes the impact of a specific development to the area roadway system, identifies any improvements necessary to maintain a satisfactory level of service, and address any safety concerns. The TIS will also help to determine the appropriate location, spacing, and design of the access system for the proposed development to ensure compliance with County Access Management Regulations as well as evaluate the internal circulation and connectivity systems of the proposed development to provide safe and efficient internal traffic flow and access to/from the adjacent and nearby roadway system.

### **302 - REQUIREMENTS**

A TIS will be required when any of the below conditions are met:

1. A proposed development generating 100 or more trip ends (entering plus exiting traffic) in the highest peak hour.
2. A change in the use of an existing parcel whereas the new use will generate 100 or more trip ends in the highest peak hour.
3. At the discretion of the County Engineer (i.e. uses generating less than 100 trips in the peak hour but whose generated volumes would still have a detrimental impact to adjacent roadway levels of service).

These trip ends shall be calculated using the latest edition of Trip Generation as published by the Institute of Transportation Engineers.

### **303 - CONTENT**

Prior to commencing the preparation of a Traffic Impact Study, the preparer shall contact appropriate County staff to outline the scope of the study. In the case of a significant development, The County Engineer may require the preparer to submit a Memorandum of Understanding (MOU) which details the assumptions and methodologies agreed upon regarding the scope of the study. The MOU will be approved by County staff within one week of receipt, assuming that all items are properly addressed.

Unless otherwise agreed upon, the TIS shall consist of the following:

#### **Title Page**

- Development name and location
- Name of applicant
- Name and contact information of preparer
- Date

#### **Introduction**

- Purpose and study objectives
- Description of proposed development
- Summary of revisions (in the case of revised reports)

#### **Summary of Area Conditions**

- Study area boundaries

- Study area land uses
- Description of existing roadway network (lane usages, lane widths, traffic control devices, speed limits, etc.)
- Location of proposed site access (reference exhibit)
- Evaluation of sight distance from proposed access
- Existing traffic volumes
- Accident experience (when requested)

### **Traffic Volume Projections**

- Summary of trip generation calculations referencing the most recent edition of the ITE Trip Generation Manual.
- For phased developments expected to take longer than 5 years, include trip generation calculations for each phase and for full build-out.
- Pass-by trip adjustments
- Background traffic adjustments based upon growth rate supplied by the County Engineer.

County Engineer may require the developer to provide counts from a similar development in the absence of available information from the ITE Trip Generation Manual. Any data other than that derived from the ITE Trip Generation Manual must be approved by the County Engineer prior to its use in any TIS.

**Analysis** – Compare existing conditions to full build (or phases when applicable) and full build year + 20 years. Analyze both AM and PM Peak hours (additional hours may be requested by the County Engineer in some cases). Any tables, graphs, charts, etc. used in this analysis must be contained within the report or the appendices.

- Level of Service, Capacity Analysis – According to most recent edition of the FHWA Highway Capacity Manual
- Turn Lane Analysis – Per the ODOT State Highway Access Management Manual
  - Turn lane lengths calculated per the ODOT Location and Design Manual, Volume One
- Traffic Signal Warrant Analysis (when applicable) – Per MUTCD

#### **Conclusions and Recommendations**

- Proposed LOS Mitigation
- Proposed safety improvements

#### **Appendices**

- Site Plan – clearly indicating proposed access and internal circulation
- Traffic Volume Data
- Computer Analysis Summaries

### **304 - GENERAL PROVISIONS**

Traffic Impact Studies shall be prepared under the supervision of a registered professional engineer in Ohio with training and experience in traffic engineering (operations and safety analysis experience).

Generally accepted principles of traffic engineering, roadway design, transportation planning, and site design as outlined in the ODOT L&D Manual, ODOT Traffic Engineering Manual, AASHTO – A Policy of Geometric Design of Highways and Streets (Green Book), ITE Trip Generation Manual, ODOT State Highway Access Management Manual, and the Transportation Research Board Access Management Manual shall be used in preparation of the TIS. Any deviation from those principles will require documentation.

DRAFT

## **DEFINITIONS**

**AASHTO** – American Association of State Highway and Transportation Officials, Policy on Geometric Design of Highways and Streets.

**CORNER CLEARANCE** – The distance from an intersection of a public or private road to the nearest access connection measured from the closest edge of pavement of the intersecting road or drive to the closest edge of pavement to the proposed connection.

**DRIVEWAY** – A vehicular travel way, other than a street or alley, used to provide access from a roadway to one or more lots of record.

**DRIVEWAY PERMIT** – Grants permission to construct a driveway facility at an approved access point and requires that such driveway shall be constructed according to the provisions of that permit.

**EASEMENT** – Authorization by a property owner for the use by another, and for a specified purpose, of any designated part of his/her property.

**FULL ACCESS DRIVE** – An entrance/exit allowing complete use of all possible turning movements.

FUNCTIONAL CLASSIFICATION – Method of establishing a hierarchy of roadways based upon the type of service they provide. Reference the Clermont County Thoroughfare Plan for roadway functional classification information.

JOINT AND CROSS ACCESS DRIVES – Easement(s) containing a system of driveways and/or service lanes to access properties and facilities as opposed to using direct access driveways to the public road.

LIMITED ACCESS DRIVE – An entrance/exit where one or more possible turning movements are prohibited.

LOS – LEVEL OF SERVICE – A qualitative assessment of the operational characteristics of a roadway or intersection. This measurement reflects the relative ease of traffic flow on a scale of A to F. LOS – A represents free flow while LOS – F represents congested conditions.

MAY – A statement of practice that is a permissive condition and carries no requirement or recommendation.

SHALL – A statement of required, mandatory, or specifically prohibited action.

SHOULD – A statement of recommended, but not mandatory, practice in typical situations, with deviations allowed if engineering judgment or engineering study indicates the deviation to be appropriate.

SIGHT DISTANCE – Length of visible roadway allowing a driver opportunity to make safe decisions. See the Ohio Department of Transportation Location and Design Manual, Volume One for more information.

THROAT LENGTH – Distance measured from the edge of pavement of the public road to the first point of access of a driveway or service drive. See Figure 1.

TIS – Traffic Impact Study – Compares the existing conditions of a roadway or network to the anticipated conditions after a particular development is built and recommends mitigation measures required to offset any disparity.



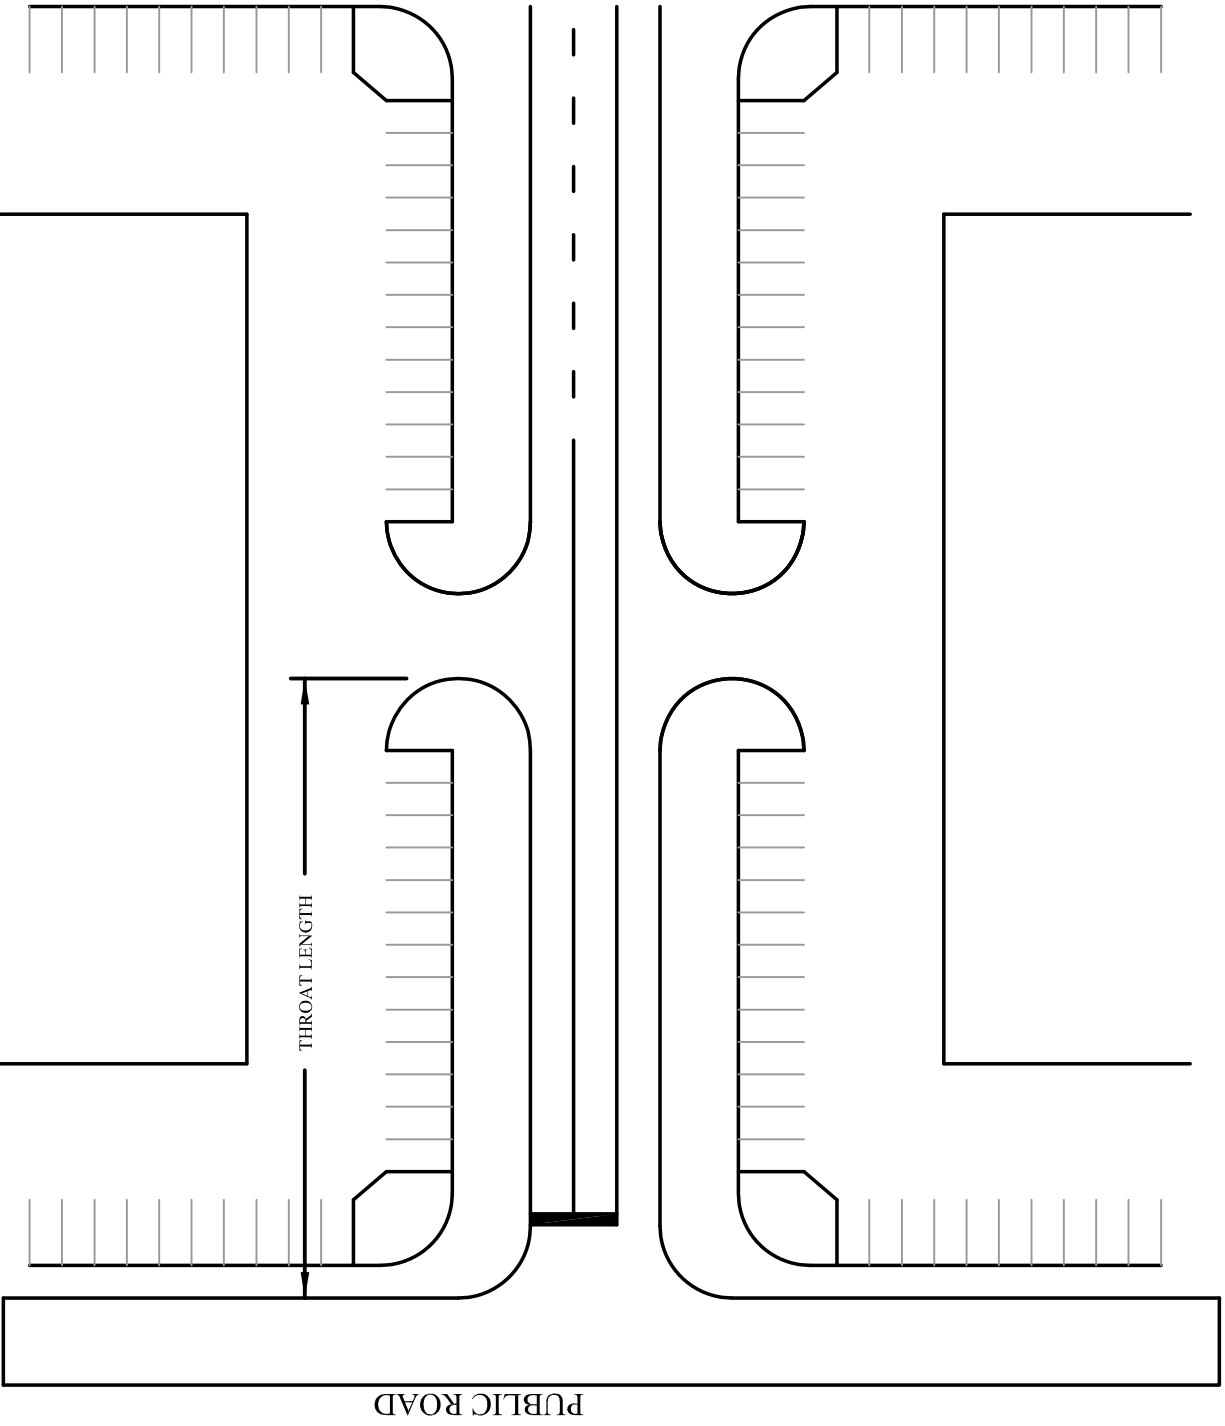


FIGURE 1

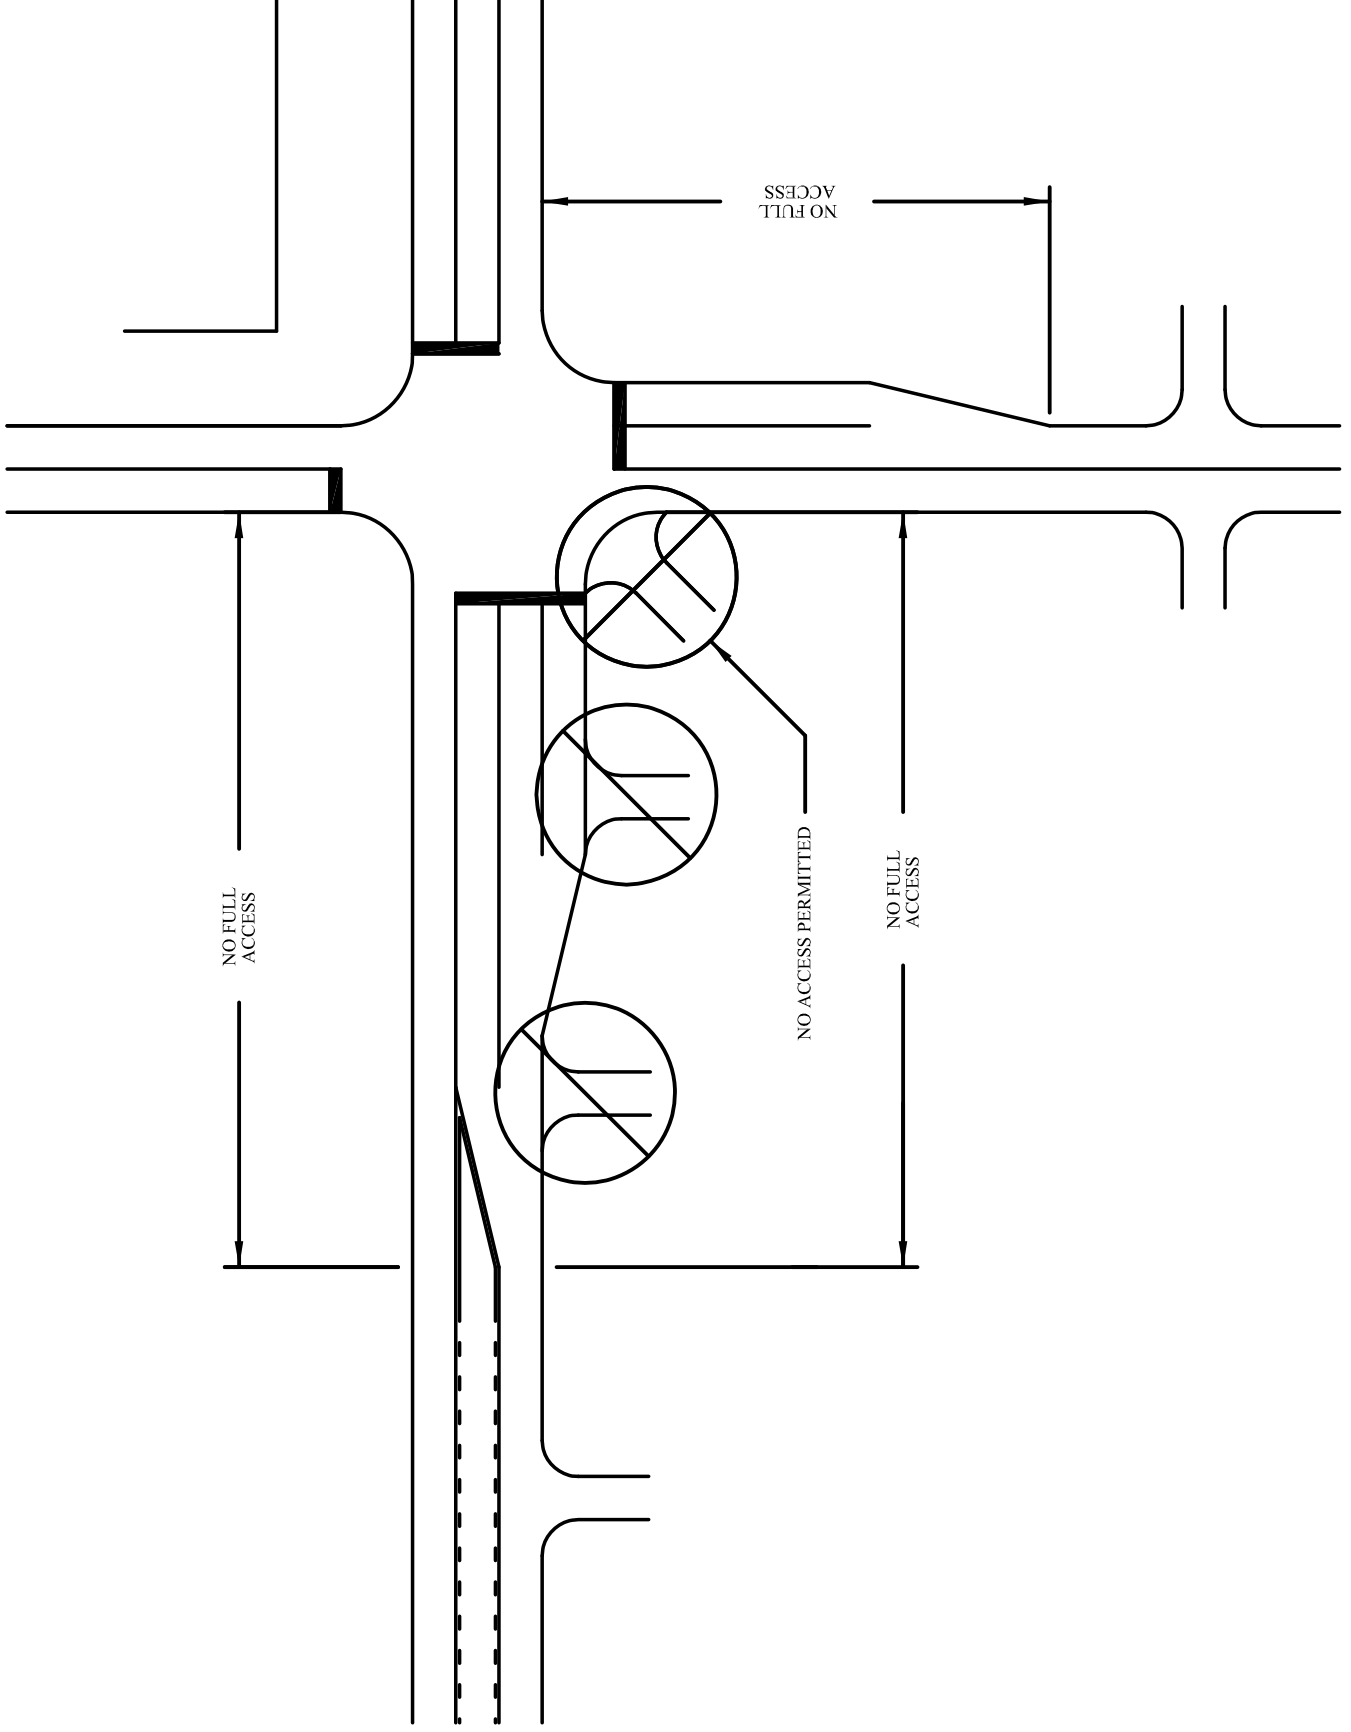

SEE TABLES 1 & 2 FOR ACCESS SPACING REQUIREMENTS

FIGURE 2

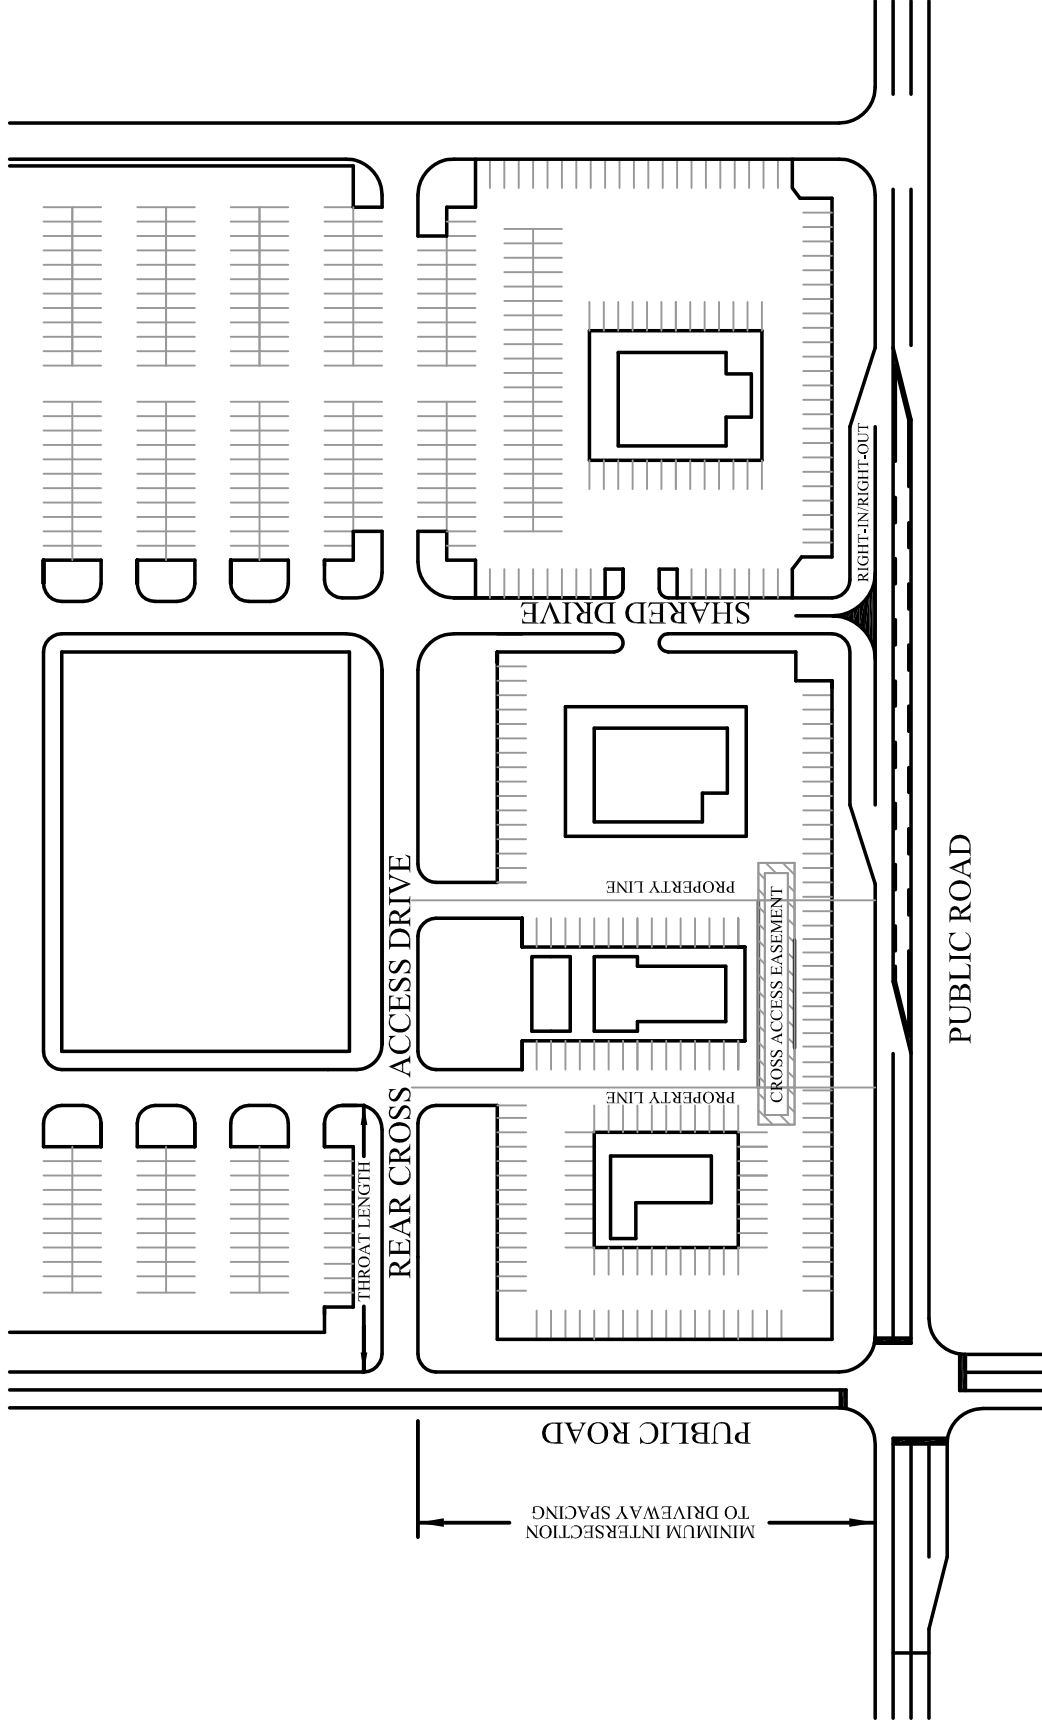

SEE TABLES 1 & 2 FOR ACCESS SPACING REQUIREMENTS

FIGURE 3